



Track4 "Foot-Mounted IMU (offsite-online)" special features

Organizational aspects:

Database/dataset access

- As initiated last in Spain in 2021, Track4 is now an “offsite-online” track. That means, we ask to competitors to process data **as if they were in real time**. To do so, an interface based on a web API has been developed: EvaalAPI. This API will be used by competitors for sending position estimates and reading the sensor values:
<https://evaal.aaloo.org/evaalapi/>
- In the context of this EvaalAPI framework, two “scoring trial” (“scoring trial#1” and “scoring trial#2” described later) will be proposed to competitors. **Each of these scoring trial will be usable only once**. Competitors have thus two trials, for the evaluation.
- In order to help competitors to be prepared for the evaluation, a “testing trial” is proposed. This “testing trial” is fully accessible or reloadable (ie not restricted to a single usage as scoring trials). GroundTruth positions are included in the “testing trial” under the POSI label, for validation purpose.
- Extract from <https://evaal.aaloo.org/2023/call-for-competition> :
“OFFSITE-ONLINE TRACKS : Competitors are provided with sensors data and use them to estimate the user position. Competitors calibrate their algorithms in advance using ground truth reference data (testing trials) and compete using new unreferenced data (scoring trials). Competitors run their Trials through the EvaalAPI in the usual online mode to emulate the causal, real-time behavior of onsite Tracks. Scoring trials are run on a Track-specific day during the second week of September.”

Competitor admission process / Application:

- See: <https://evaal.aaloo.org/2023/call-for-competition>

Submission of the processed results

- As mentioned earlier, results have to be submitted via a web API. See above.
- A participant team can run the process up to 2 times. This lets a chance to catch-up if any issues happen. Although the competition organizers will evaluate the two scoring trials, only the best one will be considered for the contest. These two datasets correspond to two different data collection performed on the same path but not at the same time.

Important deadlines:

- | | |
|--|--|
| • Technical annexes published | April, 2023 |
| • “testing trial” is accessible by files | April, 2023 |
| • Application deadline | May 31st, 2023 |
| • “testing trial” is accessible through web API | June, 2023 |
| • “scoring trial#1” and “scoring trial#2” will be accessible 2023(in-September) | TBD—September 13th, |
| • Proclamation of winners | September 28th, 2023 |




Scope

Many indoor navigation systems have been developed for pedestrians and assessing their performances is a real challenge. Benefiting from a reference solution that is accurate enough to evaluate other indoor navigation systems and assist novel research is of prime interest. According to ISO18305:2016 two different ways can be used for assessing indoor localization system: “Off-line surveyed test point” that is commonly used, or “reference system” with an accuracy at least one order of magnitude better the system you want to test. The scope of this track4 is clearly focused on the second way of assessing.


This track4 is based on the same equipment named “ULISS” as previous competitions hold during IPIN2022 and IPIN2021.

Competition Goal

The goal of this competition is to evaluate how good up-to-date INS algorithm is. Each competitor will have access to a dataset logged with ULISS (Ubiquitous Localization with Inertial Sensors and Satellites), a state-of-the-art Inertial Navigation System producing IMU data, MAG data, PRESSURE data & GNSS data, without the help of any maps.

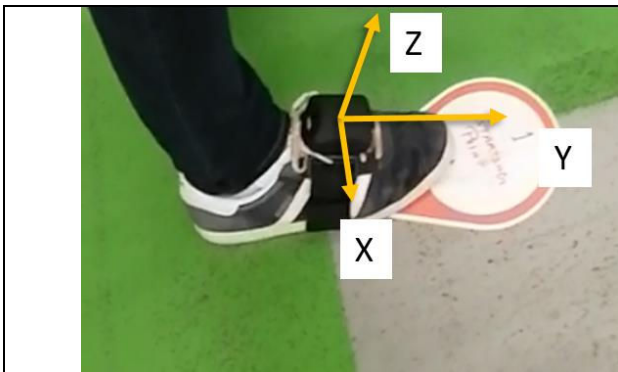

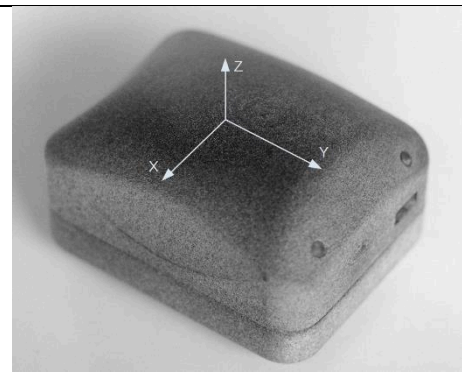

ULISS sensor installed on the right foot (with axes), on the starting point.




ULISS sensors axes

Description of Datasets

Data is recorded from 3 different sensors:

<p>Xsens Mti-7</p> 	<p>IMU-Mag sensor: -3D accelerometer -3D gyrometer -3D magnetometer</p> <p>https://www.xsens.com/mti-7</p>
<p>BMP280 sensor</p> 	<p>Operation range: Pressure: 300...1100 hPa Absolute accuracy : $\sim \pm 1$ hPa Relative accuracy : ± 0.12 hPa (typical)</p> <p>https://www.bosch-sensortec.com/products/environmental-sensors/pressure-sensors/bmp280/</p>
<p>Ublox ZED-F9P dual freq. receiver</p>	<p>Multi GNSS Receiver : BeiDou, Galileo, GLONASS, GPS / QZSS Number of concurrent GNSS 4</p>



	<p>Dual GNSS Bands : L1C/A, L2C, L1OF, L2OF, E1B/C, E5b, B1I, B2I</p> <p>https://www.u-blox.com/en/product/zed-f9p-module</p>
---	--

Unit and meaning of the sensors outputs of ULISS are the following ones:

Column	Xsens MTi-1 (accelerometer)	Comments
1	Acceleration label	"ACCE"
2	GPS Time of Week (ToW) in second	GPS Time of Week (ToW) in second
3	Acc X (m/s ²)	
4	Acc Y (m/s ²)	
5	Acc Z (m/s ²)	

Sample strings for accelerometer data

```
ACCE,314410.003952000,-1.25709,-4.34142,8.75831
ACCE,314410.008947000,-1.23771,-4.28408,8.72497
ACCE,314410.013942000,-1.26714,-4.3795,8.72491
ACCE,314410.018937000,-1.26167,-4.29823,8.71566
ACCE,314410.023932000,-1.25662,-4.26479,8.71095
```

Column	Xsens MTi-1 (gyrometer)	Comments
1	Gyrometer label	"ROTA"
2	GPS Time of Week (ToW) in second	GPS Time of Week (ToW) in second
3	Gyro X (rad/s)	
4	Gyro Y (rad/s)	
5	Gyro Z (rad/s)	

Sample strings for gyrometer data

```
ROTA,314410.004573000,0.00275338,-0.000805736,0.006387
ROTA,314410.009578000,-0.00576329,-0.00401807,0.00535798
ROTA,314410.014582000,0.00813067,0.00989926,0.00747764
ROTA,314410.019587000,0.00594413,-0.00079453,0.00529695
ROTA,314410.024591000,0.00488472,0.00237882,0.0117271
```

Column	Xsens MTi-1 (magnetometer)	Comments
1	Magnetometer label	"MAGN"
2	GPS Time of Week (ToW) in second	GPS Time of Week (ToW) in second
3	Mag X (a.u.)	a.u. = arbitrary unit according to Xsens.
4	Mag Y (a.u.)	Tips : multiply by 0.49*1000,
5	Mag Z (a.u.)	In order to get milliGauss (mG)

Sample strings for magnetometer data

```
MAGN,314410.005162000,0.224368,0.435266,-1.14962
MAGN,314410.015162000,0.22387,0.434764,-1.14766
MAGN,314410.025162000,0.222876,0.438141,-1.1481
MAGN,314410.035162000,0.223393,0.433828,-1.14817
MAGN,314410.045162000,0.224333,0.431291,-1.1413
```



Column	BMP280 (pressure)	Comments
1	Pressure sensor label	"PRES"
2	GPS Time of Week (ToW) in second	GPS Time of Week (ToW) in second
3	Pressure (Pa)	

Sample strings for pressure data

PRES,314410.005162000,101144
PRES,314410.025162000,101152
PRES,314410.045162000,101138
PRES,314410.065162000,101151
PRES,314410.085162000,101151

Column	Temperature (temperarure)	Comments
1	Temperature sensor label	"TEMP"
2	GPS Time of Week (ToW) in second	GPS Time of Week (ToW) in second
3	Temperature (Degree Celsius)	

Sample strings for temperature data

TEMP,314410.025162000,44.1914
TEMP,314411.025162000,44.1758
TEMP,314412.025162000,44.1758

Column	Ublox F9P GNSS receiver (SBS)	Comments
1	GNSS SBAS information label	"GSBS"
2	GPS Time of Week (ToW) in second	GPS Time of Week (ToW) in second
3	Hexadecimal WORD	Corresponds to EGNOS SBAS Message Format*

*: [https://gssc.esa.int/navipedia/index.php/The EGNOS SBAS Message Format Explained](https://gssc.esa.int/navipedia/index.php/The_EGNOS_SBAS_Message_Format_Explained)

Sample strings for SBS (SBAS – EGNOS) data

GSBS,315499,9A494C0000000000000400001F00003F80003FC0003FE0001FF0001FF80
GSBS,315618,5363FBFFDC000000000000197BBBAA01848160A0580B185BFDFF980900
GSBS,315619,9A0A8003FE4027FFBFC7FEFFD4003FEC000003FB800395959797BA380

Column	Ublox F9P GNSS receiver (SBS)	Comments
1	GNSS Observation label	"GOBS"
2	GPS Time of Week (ToW) in second	GPS Time of Week (ToW) in second
3	Observation data	Observation file based on RINEX 3.04 format http://rtcm.info/RINEX 3.04.IGS.RTCM_Final.pdf Only data after header* is used in the context of IPIN2021-Track4.

*Header of "OBSERVATION DATA" file under Rinex 3.04 format are given later in each session specific parts (headers are slightly different).

Sample strings for OBS (observation file, based on RINEX 3.04 format) data

GOBS,314856.199000000,G04	24066762.037	8	126471694.10925	-3666.900	39.000
GOBS,314856.199000000,G09	21204418.682	8		-2579.258	24.000
GOBS,314856.199000000,G06	21843663.561	9		-3361.335	14.000
GOBS,314856.199000000,C24	24066200.488	4		-1496.777	42.000
GOBS,314856.199000000,C09	41038802.886	9	213699815.76337	-1391.943	30.000



GOBS, 314856.199000000, R10	20885796.375	8	111333055.23728	-1125.414	35.000	
GOBS, 314856.199000000, R17	21027399.505	9	112521861.85837	1.771	31.000	
GOBS, 314856.199000000, G16	24420695.497	9		-607.284	34.000	
GOBS, 314856.199000000, E25	26416183.541	9		1623.139	22.000	
GOBS, 314856.199000000, R09	23641111.957	9		-3901.952	26.000	
GOBS, 314856.199000000, E24	27240945.515	8		-857.287	38.000	
GOBS, 314856.199000000, E05	27154158.133	8		-2871.781	35.000	
GOBS, 314856.399000000, G04	24066902.088	8	126472426.50726	-3656.825	35.000	
GOBS, 314856.399000000, G09	21204516.880	8		-2576.887	25.000	
GOBS, 314856.399000000, G06	21843791.401	9		-3361.335	14.000	
GOBS, 314856.399000000, C24	24066258.112	4	125319321.10437	-1491.643	44.000	
GOBS, 314856.399000000, C09	41038856.136	8	213700093.52228	-1387.629	30.000	
GOBS, 314856.399000000, R10	20885839.907	8	111333279.85427	-1119.290	37.000	
...						
GOBS, 316465.400000000, G09	22053796.355	9		-2965.625	42.000	22053774.011 9
9	-2311.088	23.000				
GOBS, 316465.400000000, G06	22958748.483	8		-3890.580	43.000	22958742.892 9
9	-3018.360	18.000				
GOBS, 316465.400000000, G04	25190987.721	9		-3672.705	35.000	
GOBS, 316465.400000000, G20	20618874.632	4		1326.448	48.000	
GOBS, 316465.400000000, G07	20956968.745	8		-528.696	32.000	
GOBS, 316465.400000000, C14	26537412.626	9		-3269.531	39.000	

Column	ground truth position	Comments
1	ground truth position label	"POSI"
2	GPS Time of Week (ToW) in second	GPS Time of Week (ToW) in second
3	WGS84 longitude in decimal degrees	
4	WGS84 latitude in decimal	
5	Floor Number in integer	0 : Ground Floor, -1, 1, 2
6	POSI number index	

Sample strings for ground truth position data

POSI, 308945.294, -1.6313191524195993, 47.22617430160391, -1, 1
POSI, 308960.836, -1.6310604539849840, 47.22612380681056, -1, 2

Note1: POSI frame is only used twice in scoring trials. For the first Key Point (n°1) and the second Key Point (n°2).

Note2: POSI frame is used in testing trial to help competitors to tune their algorithm.



Testing Trial#1: dataset recorded around 15h45 (local time), the 15th of September 2021 in Nantes



The materials and methods provided by the competition organizers are:

Type	Description	URL to download
Testing Trial#1	CSV file containing all data as described in section "Description of Datasets". GroundTruth is given inside IPIN2022_T4_TestingTrial01.txt under POSI frames.	https://evaal.aaloo.org/files/2022/IPIN2022_T4_Trials.7z
Allan Variance	static logfile of more than 15 hours that can be used for sensors bias estimation.	http://evaal.aaloo.org/images/2021/track4/2021.09_ULISS_AllanVariance.zip
Magnetometer Calibration	logfile of about 1 minute that can be used to calibrate the magnetometer sensor	http://evaal.aaloo.org/images/2021/track4/2021.09.15_ULISS_MagCalib.zip
GNSS Navigation file	contains ephemeris data for those who want to use GNSS sensor. (format RINEX 3.04)	http://evaal.aaloo.org/images/2021/track4/session1_gnss.nav
GNSS Observation header	<pre> 3.04 OBSERVATION DATA M: Mixed RTKCONV demo5 b34c 20210930 154220 UTC format: u-blox UBX log: D:\IPIN2021\DataCollection\2021.09.15_15h30_Acqui1\ULIS </pre>	<pre> RINEX VERSION / TYPE PGM / RUN BY / DATE COMMENT MARKER NAME MARKER NUMBER MARKER TYPE OBSERVER / AGENCY REC # / TYPE / VERS ANT # / TYPE APPROX POSITION XYZ ANTENNA: DELTA H/E/N SYS / # / OBS TYPES SYS / # / OBS TYPES SYS / # / OBS TYPES SYS / # / OBS TYPES SYS / # / OBS TYPES TIME OF FIRST OBS GPS TIME OF LAST OBS GPS SYS / PHASE SHIFT SYS / PHASE SHIFT SYS / PHASE SHIFT SYS / PHASE SHIFT SYS / PHASE SHIFT SYS / PHASE SHIFT SYS / PHASE SHIFT SYS / PHASE SHIFT SYS / PHASE SHIFT SYS / PHASE SHIFT GLONASS SLOT / FRQ # GLONASS SLOT / FRQ # GLONASS COD/PHS/BIS END OF HEADER </pre>
RINEX 3.04 spec	Specification of RINEX format The Receiver Independent Exchange Format, Version 3.04	http://evaal.aaloo.org/images/2021/track4/RINEX_3.04.IGS.RTCM_Final.pdf

- **Key Points:**
 - 84 key points re listed in this Testing Trial, under POSI lines in both IPIN2022_T4_TestingTrial01.txt, and EvaalAPI datastream.



- Evaluation is based like other Tracks: i.e. position has to be computed and sent twice a second (~2Hz), synchronized with the eval data stream, and thus corresponding to the end of each dataset window of 0.5s.
- The output format is described in the chapter “Description of the Output File” here after.
- **Points given in order to get a good first heading:**
 - **Coordinates of Key Point n°1:**
 - GPS Time of Week in seconds: **308945.294 s**
 - WGS84 longitude in decimal degrees: **-1.631319152 °**
 - WGS84 latitude in decimal degrees: **47.226174301 °**
 - Floor Number in integer: **-1**
 - **Coordinates of Key Point n°2:**
 - GPS Time of Week in seconds: **308960.836 s**
 - WGS84 longitude in decimal degrees: **-1.631060453 °**
 - WGS84 latitude in decimal degrees: **47.226123806 °**
 - Floor Number in integer: **-1**
- **Bird view:**

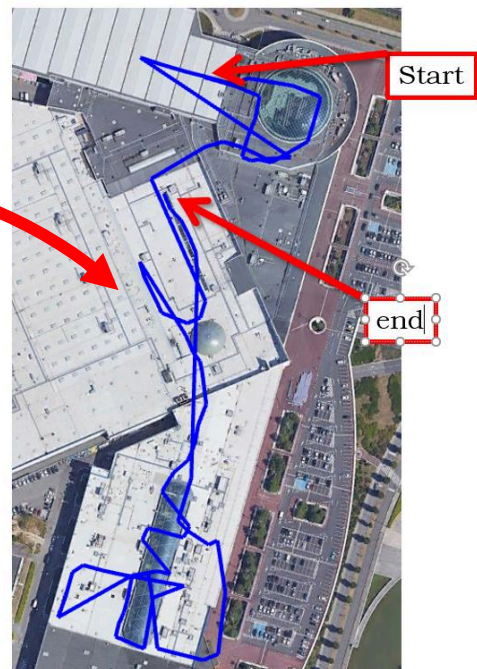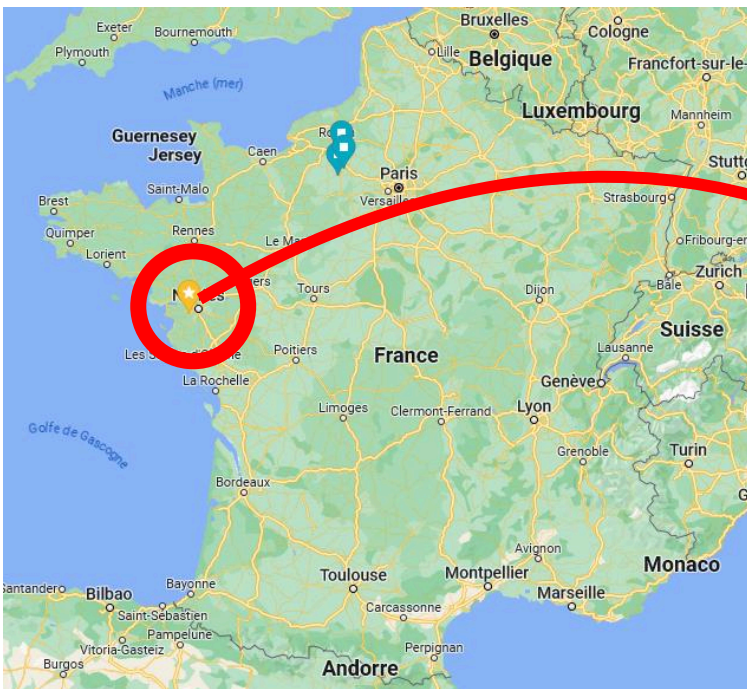



Testing Trial#2: dataset recorded around 11h30 (local time), the 14th of June 2023 in Nuremberg

Type	Description	URL to download
Testing Trial#2	CSV file containing all data as described in section "Description of Datasets". GroundTruth is given inside IPIN2023_T4_TestingTrial02.txt under POSI frames.	https://evaal.aaloo.org/files/2023/IPIN2023_T4_TestingTrial02.txt.xz
Allan Variance	static logfile of about 12 hours that can be used for sensors bias estimation.	https://evaal.aaloo.org/files/2023/IPIN2023_T4_calibration/IPIN2023_T4_ULISS_AllanVariance.7z
Magnetometer Calibration	logfile of about 1 minute that can be used to calibrate the magnetometer sensor	https://evaal.aaloo.org/files/2023/IPIN2023_T4_calibration/IPIN2023_T4_ULISS_MagCalib.7z
GNSS Navigation file	contains ephemeris data for those who want to use GNSS sensor. (format RINEX 3.04)	https://evaal.aaloo.org/files/2023/IPIN2023_T4_calibration/IPIN2023_T4_Trial_gnss_ephem.nav
GNSS Observation header	<pre> 3.04 OBSERVATION DATA M: Mixed RINEX VERSION / TYPE RTKCONV demo5 b34c 20230713 083128 UTC PGM / RUN BY / DATE format: NovAtel OEM7 COMMENT log: D:\IPIN2023\PROPACK\Rover\NMND21380003K_2023-06-14_09-4COMMENT MARKER NAME MARKER NUMBER MARKER TYPE OBSERVER / AGENCY REC # / TYPE / VERS ANT # / TYPE APPROX POSITION XYZ ANTENNA: DELTA H/E/N G 12 C1C L1C D1C S1C C2W L2W D2W S2W C5Q L5Q D5Q S5Q SYS / # / OBS TYPES R 8 C1C L1C D1C S1C C2P L2P D2P S2P SYS / # / OBS TYPES E 8 C1C L1C D1C S1C C7Q L7Q D7Q S7Q SYS / # / OBS TYPES C 16 C2I L2I D2I S2I C7I L7I D7I S7I C7D L7D D7D S7D C5P SYS / # / OBS TYPES L5P D5P S5P 2023 06 14 09 35 11.2000000 GPS TIME OF FIRST OBS 2023 06 14 09 45 25.4000000 GPS TIME OF LAST OBS G L1C SYS / PHASE SHIFT G L2W 0.00000 SYS / PHASE SHIFT G L5Q -0.25000 SYS / PHASE SHIFT R L1C SYS / PHASE SHIFT R L2P 0.25000 SYS / PHASE SHIFT E L1C 0.50000 SYS / PHASE SHIFT E L7Q -0.25000 SYS / PHASE SHIFT C L2I SYS / PHASE SHIFT C L7I SYS / PHASE SHIFT C L7D SYS / PHASE SHIFT C L5P 0.25000 SYS / PHASE SHIFT 1 R09 -2 GLONASS SLOT / FRQ # C1C 0.000 C1P 0.000 C2C 0.000 C2P 0.000 GLONASS COD/PHS/BIS END OF HEADER </pre>	
RINEX 3.04 spec	Specification of RINEX format The Receiver Independent Exchange Format, Version 3.04	http://evaal.aaloo.org/images/2021/track4/RINEX_3.04.IGS.RTCM_Final.pdf

• **Note about Maps use**

- Even if maps may be allowed in others tracks, for this one, **it is NOT**. Track chairs, in such a case, could cancel contributions of competitor.
- Algorithms are not supposed to embed or access maps to enhance positioning.



• **Key Points:**

- 30 key points re listed in this Testing Trial, under POSI lines in both IPIN2023_T4_TestingTrial02.txt, and EvalAPI datastream.
- Evaluation is based like other Tracks: i.e. position has to be computed and sent twice a second (~2Hz), synchronized with the eval data stream, and thus corresponding to the end of each dataset window of 0.5s.
- The output format is described in the chapter “Description of the Output File” here after.

• **Points given in order to get a good first heading:**


○ **Coordinates of Key Point n°1:**

- GPS Time of Week in seconds: *293919.833 s*
- WGS84 longitude in decimal degrees: *11.111207991 °~~11.111207986~~*
- WGS84 latitude in decimal degrees: *49.461511995 °~~49.461512004~~*
- Floor Number in integer: *0*

○ **Coordinates of Key Point n°2:**

- GPS Time of Week in seconds: *293973.817 s*
- WGS84 longitude in decimal degrees: *11.111229135 °~~11.111139902~~*
- WGS84 latitude in decimal degrees: *49.461476229 °~~49.461529297~~*
- Floor Number in integer: *0*

• **Bird view:**

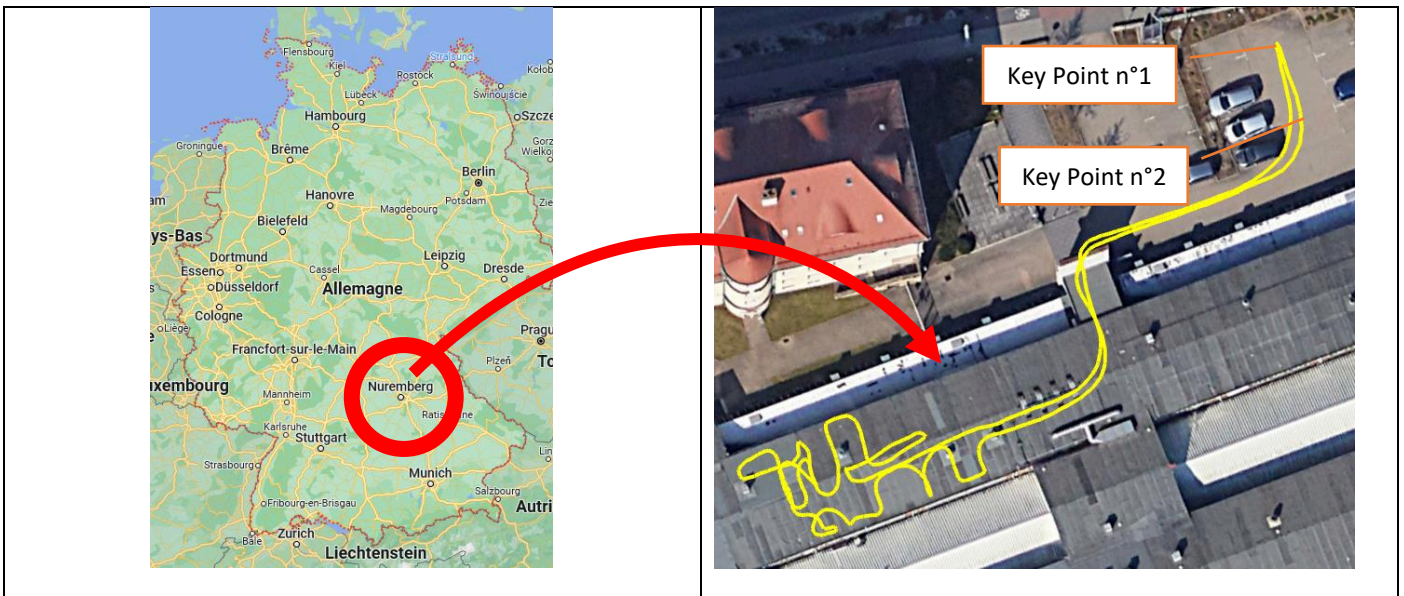



Scoring Trial#1: dataset recorded around 12h20 (local time), the 14th of June 2023 in Nuremberg

Type	Description	URL to download
Testing Trial#2	<u>SCORING TRIAL is only accessible via EvaalAPI</u>	-
Allan Variance	static logfile of about 12 hours that can be used for sensors bias estimation.	https://evaal.aaloa.org/files/2023/IPIN2023_T4_calibration/IPIN2023_T4_ULISS_AllanVariance.7z
Magnetometer Calibration	logfile of about 1 minute that can be used to calibrate the magnetometer sensor	https://evaal.aaloa.org/files/2023/IPIN2023_T4_calibration/IPIN2023_T4_ULISS_MagCalib.7z
GNSS Navigation file	contains ephemeris data for those who want to use GNSS sensor. (format RINEX 3.04)	https://evaal.aaloa.org/files/2023/IPIN2023_T4_calibration/IPIN2023_T4_Scoring1_gnss_ephem.nav
GNSS Observation header	<pre> 3.04 OBSERVATION DATA M: Mixed RINEX VERSION / TYPE RTKCONV demo5 b34c 20230712 153016 UTC PGM / RUN BY / DATE format: u-blox UBX COMMENT log: D:\IPIN2023\ULISS1\Scoring#1\uliss-1-trace-703\gnss.ubxCOMMENT MARKER NAME MARKER NUMBER MARKER TYPE OBSERVER / AGENCY REC # / TYPE / VERS ANT # / TYPE APPROX POSITION XYZ ANTENNA: DELTA H/E/N SYS / # / OBS TYPES SYS / # / OBS TYPES SYS / # / OBS TYPES SYS / # / OBS TYPES SYS / # / OBS TYPES 2023 06 14 10 07 37.0020000 GPS TIME OF FIRST OBS 2023 06 14 10 39 30.6020000 GPS TIME OF LAST OBS G L1C SYS / PHASE SHIFT G L2X -0.25000 SYS / PHASE SHIFT R L1C SYS / PHASE SHIFT R L2C SYS / PHASE SHIFT E L1X 0.00000 SYS / PHASE SHIFT E L7X 0.00000 SYS / PHASE SHIFT S L1C SYS / PHASE SHIFT C L2I SYS / PHASE SHIFT C L7I SYS / PHASE SHIFT 10 R01 1 R02 -4 R03 5 R09 -2 R10 -7 R15 0 R16 -1 R17 4 GLONASS SLOT / FRQ # R18 -3 R19 3 GLONASS SLOT / FRQ # C1C 0.000 C1P 0.000 C2C 0.000 C2P 0.000 GLONASS COD/PHS/BIS END OF HEADER </pre>	
RINEX 3.04 spec	Specification of RINEX format The Receiver Independent Exchange Format, Version 3.04	http://evaal.aaloa.org/images/2021/track4/RINEX_3.04.IGS.RTCM_Final.pdf

- **Note about Maps use**
 - Even if maps may be allowed in others tracks, for this one, **it is NOT**. Track chairs, in such a case, could cancel contributions of competitor.
 - Algorithms are not supposed to embed or access maps to enhance positioning.
- **Key Points:**
 - We target between 80 and 100 key points for evaluation of Track4



- Evaluation is now based like other Tracks: i.e. position has to be computed and sent twice a second (~2Hz), synchronized with the eval data stream, and thus corresponding to the end of each dataset window of 0.5s.
- The output format is described in the chapter “Description of the Output File” here after.

● **Points given in order to get a good first heading:**


○ **Coordinates of Key Point n°1:**

- GPS Time of Week in seconds: **295696.590** *coming soon*
- WGS84 longitude in decimal degrees: **11.111207981** ° *coming soon*
- WGS84 latitude in decimal degrees: **49.461511986** ° *coming soon*
- Floor Number in integer: **00**
- Corresponding POSI line:
POSI,295696.590,11.111207981,49.461511986,0,1 *coming soon*

○ **Coordinates of Key Point n°2:**

- GPS Time of Week in seconds: **295763.073** *coming soon*
- WGS84 longitude in decimal degrees: **11.111234629** ° *coming soon*
- WGS84 latitude in decimal degrees: **49.461431209** ° *coming soon*
- Floor Number in integer: **00**
- Corresponding POSI line:
POSI,295763.073,11.111234629,49.461431209,0,2 *coming soon*

● **Bird view:**

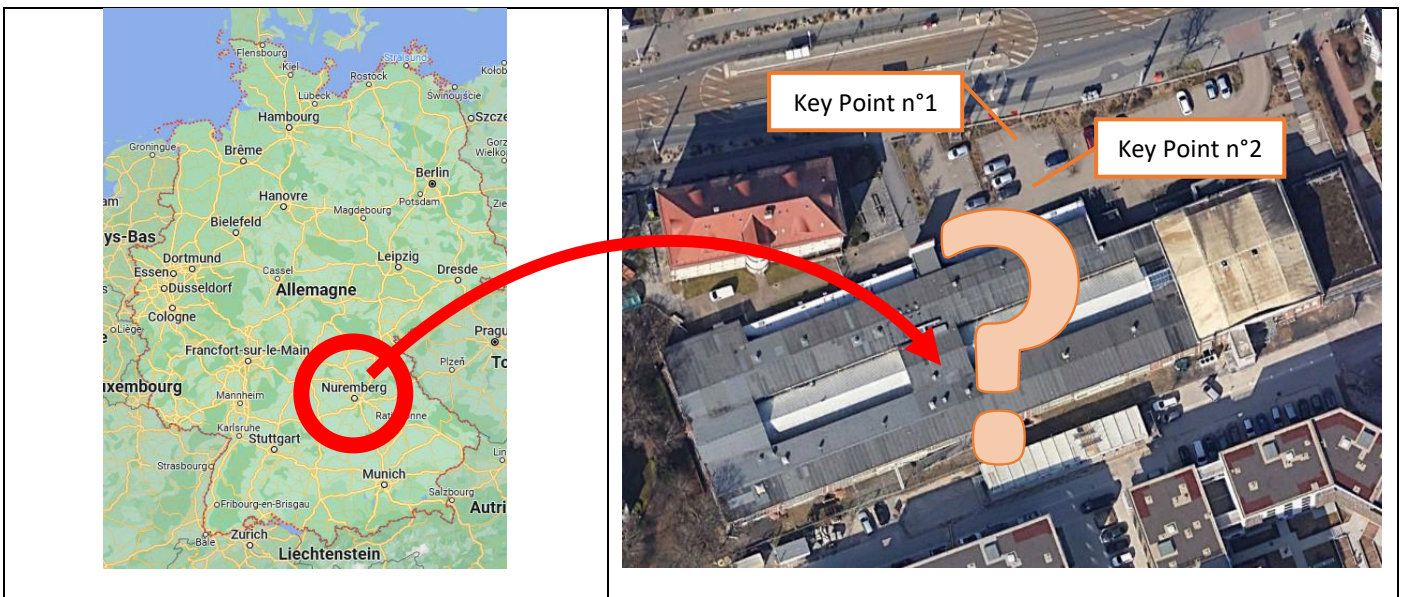



Scoring Trial#2: dataset recorded around 15h00 (local time), the 14th of June 2023 in Nuremberg

Type	Description	URL to download
Testing Trial#2	<u>SCORING TRIAL is only accessible via EvaalAPI</u>	-
Allan Variance	static logfile of about 12 hours that can be used for sensors bias estimation.	https://evaal.aaloo.org/files/2023/IPIN2023_T4_calibration/IPIN2023_T4_ULISS_AllanVariance.7z
Magnetometer Calibration	logfile of about 1 minute that can be used to calibrate the magnetometer sensor	https://evaal.aaloo.org/files/2023/IPIN2023_T4_calibration/IPIN2023_T4_ULISS_MagCalib.7z
GNSS Navigation file	contains ephemeris data for those who want to use GNSS sensor. (format RINEX 3.04)	https://evaal.aaloo.org/files/2023/IPIN2023_T4_calibration/IPIN2023_T4_Scoring2_gnss_ephem.nav
GNSS Observation header	<pre> 3.04 OBSERVATION DATA M: Mixed RINEX VERSION / TYPE RTKCONV demo5 b34c 20230712 153520 UTC PGM / RUN BY / DATE format: u-blox UBX COMMENT log: D:\IPIN2023\ULISS1\Scoring#2\uliss-1-trace-704\gnss.ubxCOMMENT MARKER NAME MARKER NUMBER MARKER TYPE OBSERVER / AGENCY REC # / TYPE / VERS ANT # / TYPE APPROX POSITION XYZ ANTENNA: DELTA H/E/N SYS / # / OBS TYPES SYS / # / OBS TYPES SYS / # / OBS TYPES SYS / # / OBS TYPES SYS / # / OBS TYPES 2023 06 14 12 40 37.4010000 GPS TIME OF FIRST OBS 2023 06 14 13 13 35.0010000 GPS TIME OF LAST OBS G L1C SYS / PHASE SHIFT G L2X -0.25000 SYS / PHASE SHIFT R L1C SYS / PHASE SHIFT R L2C SYS / PHASE SHIFT E L1X 0.00000 SYS / PHASE SHIFT E L7X 0.00000 SYS / PHASE SHIFT S L1C SYS / PHASE SHIFT C L2I SYS / PHASE SHIFT C L7I SYS / PHASE SHIFT 10 R02 -4 R03 5 R04 6 R05 1 R09 -2 R10 -7 R11 0 R18 -3 GLONASS SLOT / FRQ # R19 3 R20 2 GLONASS SLOT / FRQ # C1C 0.000 C1P 0.000 C2C 0.000 C2P 0.000 GLONASS COD/PHS/BIS END OF HEADER </pre>	
RINEX 3.04 spec	Specification of RINEX format The Receiver Independent Exchange Format, Version 3.04	http://evaal.aaloo.org/images/2021/track4/RINEX_3.04.IGS.RTCM_Final.pdf

- **Note about Maps use**

- Even if maps may be allowed in others tracks, for this one, **it is NOT**. Track chairs, in such a case, could cancel contributions of competitor.
- Algorithms are not supposed to embed or access maps to enhance positioning.

- **Key Points:**

- We target between 80 and 100 key points for evaluation of Track4



- Evaluation is now based like other Tracks: i.e. position has to be computed and sent twice a second (~2Hz), synchronized with the eval data stream, and thus corresponding to the end of each dataset window of 0.5s.
- The output format is described in the chapter “Description of the Output File” here after.

- **Points given in order to get a good first heading:**


- **Coordinates of Key Point n°1:**

- GPS Time of Week in seconds: **304872.278 *coming soon***
- WGS84 longitude in decimal degrees: **11.111207974 °*coming soon***
- WGS84 latitude in decimal degrees: **49.461512000 °*coming soon***
- Floor Number in integer: **00**
- Corresponding POSI line:
POSI,304872.278,11.111207974,49.461512000,0,1coming soon

- **Coordinates of Key Point n°2:**

- GPS Time of Week in seconds: **304928.661 *coming soon***
- WGS84 longitude in decimal degrees: **11.111240635 °*coming soon***
- WGS84 latitude in decimal degrees: **49.461430445 °*coming soon***
- Floor Number in integer: **00**
- Corresponding POSI line:
POSI,304928.661,11.111240635,49.461430445,0,2coming soon

- **Bird view:**

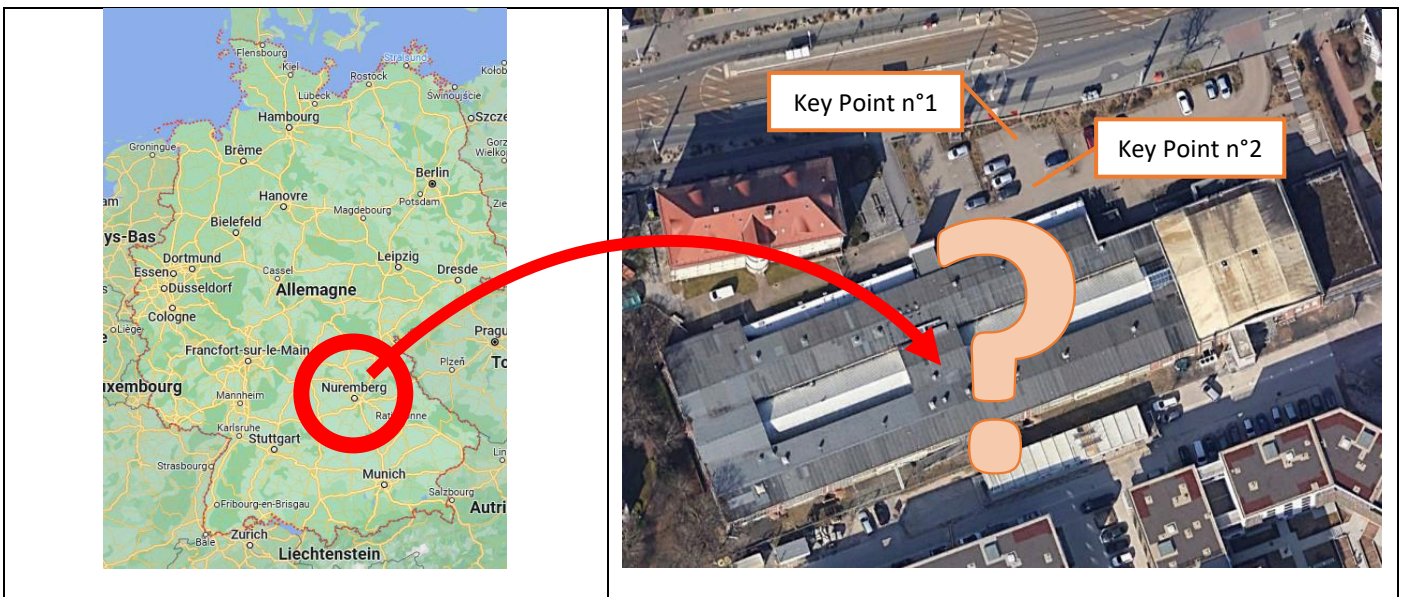



Description of the Output stream to return by competitor

For each scoring trial, competitor is asked to give processed data inside the field “position” of the *GET/TRIAL/nextdata* EvaalAPI request. The string “position” has to be composed of the 4 following fields:

- Field 1: WGS84 longitude in decimal degrees with at least 9 decimal digit resolution
- Field 2: WGS84 latitude in decimal degrees with at least 9 decimal digit resolution
- Field 3: Floor Number in integer (0 : Ground Floor, -1, 1, 2)
- Field 4: Incrementing counter starting from 1. 1 being the first point computed by competitor, 2 being the second, and so on...

Comma (“,”) has to be used as data delimiter.

Assessment will take into account the PTS (timestamp relative to the last position) return by *GET/TRIAL/estimates* EvaalAPI request.

Examples of successive string “position” included in *GET/TRIAL/nextdata* requests:

```
-1.542614572,47.217689856,0,1  
-1.542614573,47.217689855,0,2  
-1.542614574,47.217689854,2,3  
...
```

Corresponding example of *GET/TRIAL/estimates* request:

```
pts,c,h,s,pos  
217034.000,0.000,0.000,45.000,-1.542614572,47.217689856,0,1  
217034.500,1662121746.081,0.500,43.762,-1.542614572,47.217689856,0,1  
217035.000,1662121747.877,0.500,45.000,-1.542614573,47.217689855,0,2  
217035.500,1662121749.670,0.500,45.000,-1.542614574,47.217689854,2,3  
...
```



Evaluation criterion

The final metric will be based on the accuracy for the correct floor detection and the horizontal positioning error. In particular, the score for comparing the different location systems will be based on the following equations:

Accuracy Score = 3rdQuartile{SampleError(R_i, E_i)}, \forall groundtruth reference in all final test sets
 $SampleError(R_i, E_i) = Distance(R_i, E_i) + (penalty \times floorfail)$

where:

- “3rdQuartile” is the third quartile error, in meters, of a cumulative error distribution function, i.e., the error value that includes 75% of estimations (sample errors) with a lower error.
- R_i is the actual position (ground truth).
- E_i is the predicted position by the method proposed by the contest participant.
- floorfail is the absolute difference between actual floor and the predicted one.
- penalty is used to penalize errors in estimating the floor. penalty is set to 15 m.
- $Distance(R_i, E_i)$ calculates the Euclidean distance between coordinates (longitude and latitude) of R_i and E_i .

The team with the lower “Accuracy Score” wins.

Contact points and information

For any further question about the database and this competition track, please contact to:

- Miguel Ortiz (miguel.ortiz@univ-eiffel.fr) at the University Gustave Eiffel, France.
- Ni Zhu (ni.zhu@univ-eiffel.fr) at the University Gustave Eiffel, France.

Introduced changes

For any further question about the database and this competition track, please contact to:

Version 1.0	April 21 st	First version
Version 2.0	July 13 th	-Add of a second TrialTesting recorded on Nuremberg site -Add of 2 initialization Key Point and Bird view on TestingTrial#1
Version 2.1	Sept. 8th	-Correction of lat/long of Key Points 1 & 2 of TestingTrial#2 -Add of Key Points information of ScoringTrials (was in “coming soon” state in Version 2.0)